


DESCRIPTION

Boasting an impressive 550TVL, the VBP6324-256B is a high resolution colour camera. Featuring a tri-axis gimbal to enable free rotation of the built-in 2.5-6mm vari-focal lens, this unit offers an effective surveillance solution for a variety of internal applications.

Whilst the VBP6324-256B is ideal for ceiling mount installations, the tri-axis gimbal allows free lens rotation making it particularly suitable for wall mounted applications also.

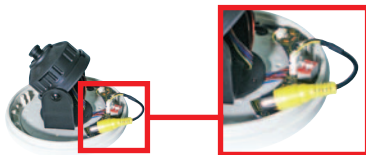

Service Video Output
Enables test monitor to be connected direct to camera

5 Year Warranty


KEY FEATURES

- | | |
|---------------------|-------------------|
| ■ CCD | 1/3" |
| ■ Resolution | 550 Lines |
| ■ Sensitivity | 0.3 Lux |
| ■ Lens Size | 2.5-6mm Varifocal |
| ■ Voltage | 12V DC / 24V AC |
| ■ Power Consumption | 200mA/2.4W |
| ■ Dimensions | 100(Ø)x102(H)mm |
| ■ Weight | Approx. 366g |

Other Features

- Auto White Balance
- Auto Gain Control
- Back Light Compensation
- Flickerless
- Service Video Output
- Tri-Axis Gimbal

Tri-Axis Gimbal

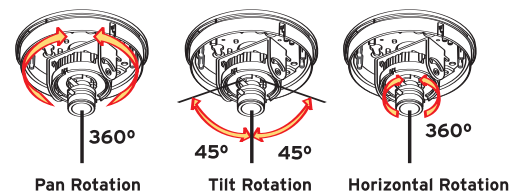

TECHNICAL SPECIFICATION

Signal System	625 Lines
Scanning System	2:1 Interlace
Scanning Frequency (H)	15.625kHz
Scanning Frequency (V)	50Hz
Image Sensor	1/3"
Total / Effective Pixels No.	470K/440K
S/N Ratio	More than 48dB (AGC Off)
Resolution	550 TV Lines
Video Output Level	1.0Vp-p (75 Ohms, composite)
Lens	Varifocal, 2.5 -6.0mm
Sync. System	Internal
Sensitivity	0.3 Lux
Electronic Shutter	1/50 ~ 100,000Sec
White Balance	Auto
AGC	Auto, On/Off (Option)
BLC	On/Off
Flickerless	On/Off
Input/Output connector	Power, Video
Power Consumption	AC 24V (20V~28V) or DC 12V (10V~15V), 5W (Max)
Dome Size	100 (Ø) x 102(H)mm
Weight	366g

www.videcon.co.uk

Vision House, High Street,
Heckmondwike, West Yorkshire
WF16 OAD UK

Tel +44 (0) 1924 528000
Fax +44(0) 1924 528005
E-mail sales@videcon.co.uk